



## 2.3" Stainless Downlight – 12V and 24V Versions

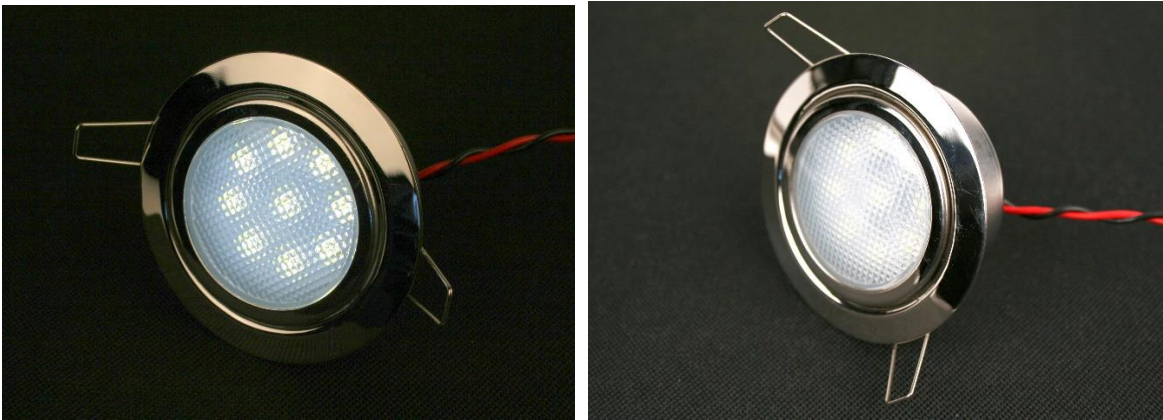

Mechanical drawing:

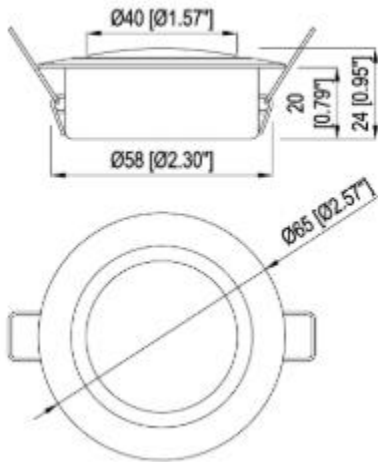

Description:

Low profile LED downlight – suitable for applications where depth of cut-out hole is limited.

Ideal for cabin and compartment lighting

Highly polished 304 stainless steel housing with Fresnel-type lens

High output 5050-type LEDs. Color temperature of 4500K

Fully sealed in silicone and resistant to vibration, corrosion and water ingress

Color temperature of cool white (5500K) and Natural White (4500K)

Available in 12VDC and 24VDC versions

Low current draw (approx.. 0.36A at 13.8VDC)

SKU: DL2.3-SS-Series

Contact: Britta Products Inc – [www.Pilotlights.net](http://www.Pilotlights.net) - (562) 344-5337