

Instructions & Specifications: 24-28V Single Channel Dimmer, 30A

This dimmer is designed to operate LED and incandescent lighting operated on 24-28VDC. It uses a remote rheostat for control of output loads using Pulse-Wave Modulation (PWM) to provide precise dimming.

Take care to ensure the dimmer does not contact surrounding metal structure or other wiring. Under heavy load, ensure the dimmer has adequate ventilation to prevent overheating.

Specifications

Mode of Operation - Continuously variable, pulse width modulation (PWM). 100hz operating frequency

Supply Voltage— 20 to 28VDC working voltage. When input voltage is larger than 36VDC, output will be turned off. When the input voltage drops to less than 36 VDC, the dimmer will reset to normal work.

Output Voltage Range - From zero VDC to supply voltage

Output Current Range - Up to 30.0 Amps

Max Continuous Output Current Full rated current up to 105 F (40C), 75% of rated current up to 115F (46C)

Ambient Temp Range - minus 40F (-40C) to 115F (46C), with restrictions as noted

DC-DC Conversion Efficiency - About 98% at full rated current, higher at lower current

Load Types - Optimized for resistive loads

Reverse Battery Protection - If input leads are reversed, the dimmer will not work. When the input leads are correctly connected, the dimmer will reset to normal work. Always use an external fuse to protect the dimmer and load.

Forward Transient Protection - Double resistive/capacitive filtering, zener diode clamping.

MCU will detect over voltage and over-current within less than 0.1 seconds

Voltage Drift - Nil

Size – 5" x 4" inch square

Weight - About 4 ounces, depending on wired connection type

Load Regulation - Generally less than 3% from minimum load to maximum load at all settings

Line Regulation - Directly proportional to supply voltage

Power Dissipation of Drive Circuitry - Less than 0.1W. No load current draw is about 2mA.


The dimmer is controlled by MCU. Provided with voltage regulation. When the dimmer is turned off, the power is not cut off completely. The power dissipation is still Less than 0.1W

Current Limiting - If light source current exceeds protected maximum of 30A per channel, the dimmer will stop functioning. To reset, remove input voltage momentarily. Be sure to fix the cause of overload before resetting. Check / replace fuse as necessary.

Wiring – Use the included color-coded wiring harness for connection to the dimmer. Observe wire color when connecting the harness.

Accessories – Rheostat knob with pre-wired color-coded harness, instruction sheet

Wiring Diagram – 24VDimmer01-30A – 30Amp PWM Dimmer

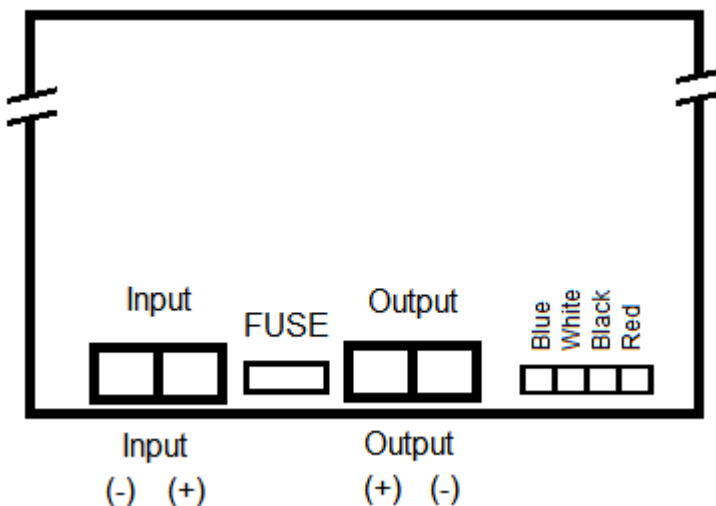

www.PilotLights.net

Model: 24VDimmer01-30A, series 30A-1

Britta Products Inc.

Long Beach, CA 05/17